


DKC Series



DKC Alloy Steel
DKC-SS Stainless Steel

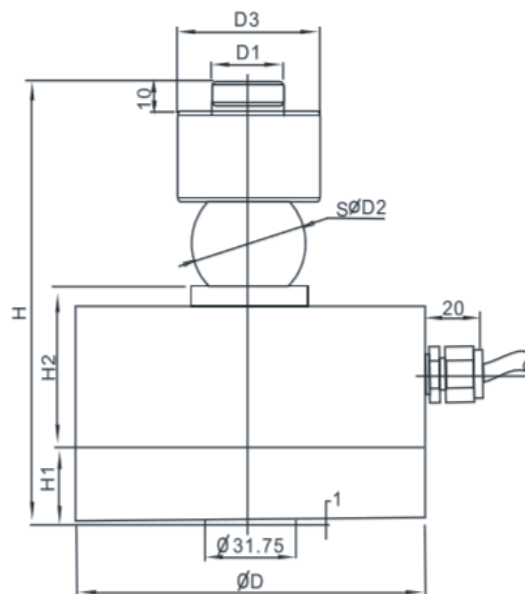

T.(Ton)	D	H1	H2	H	D1	D2	D3
2.5-5	104.6	19.2	45.3	100	21.5	19.5	37
10, 25	122	25	54	147	25	40	50
50	138	30	57	155	25	40	50

TECHNICAL PARAMETER

Remark: 4 Wire: Exc+(Red);Exc-(Black);Sig+(Green);Sig-(White)

Rated capacities(Emax)	2.5, 5, 10, 25, 50T	Temperature range, compensated	-10℃~+40℃
Sensitivity	4.0±0.006mV/V	Temperature range, operating	-30 ~+70℃
Total error	±0.05%F.S;±0.1%F.S (50T)	Maximum safe overload	100%F.S
Creep error(30min)	±0.03%F.S	Ultimate overload	120%F.S
Zero balance	±1%F.S	Excitation, recommend	10 ~12V DC
TCO	±0.02%F.S/10℃	Excitation, maximum	15V DC
TC SPAN	±0.02%F.S/10℃	Protection class	IP67
Input impedance	400±20Ω	Construction	Alloy Steel/Stainless Steel
Output impedance	352±3Ω	Cable	Length : 12m
Insulation impedance	≥5000MΩ		Diameter : φ6 mm