
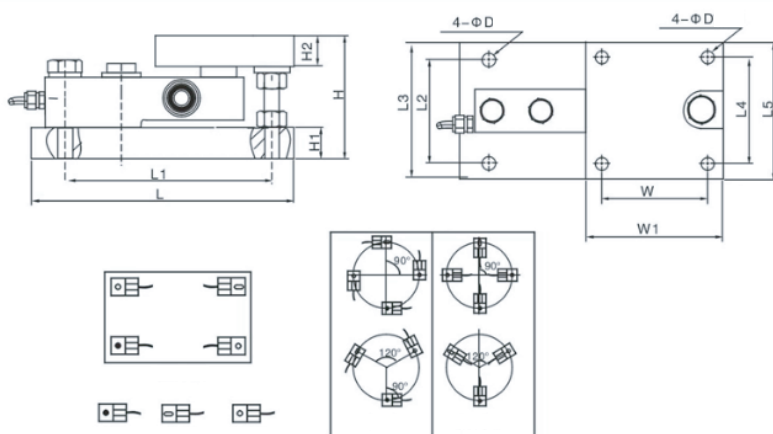


SB-SS-5T+Mounting (Stainless steel)

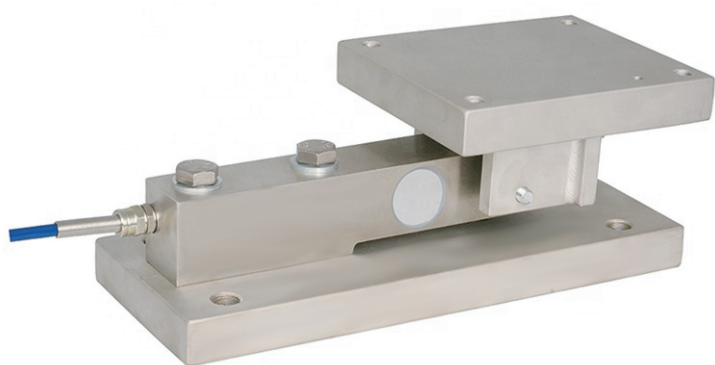

Cap (t)	L	L1	L2	L3	L4	L5	ØD	W	W1	H	H1	H2
0.5~3	286	225	80	112	102	128	13	122	150	100	19	27
5~8	317	255	100	152	120	152	18	146	178	113	23	29
10	360	296	106	154	120	154	22	152	184	152.8	38.5	38.5
20	400	350	165	220	170	220	23	170	220	195	48	48

TECHNICAL PARAMETER

Rated Load	0.5~20t	Ultimate Overload	200%F.S
Total Error	±0.2%F.S	Operating Temp. Range	(-30~+70)°C
Sensitivity	2.0000±0.002mV/V	Compensated Temp. Range	(-20~+60)°C
Recommended Excitation Voltage	5V~18V(AC or DC)	Temp. Effect ON Load	±0.02%F.S/10°C
Maximum Excitation Voltage	24V(AC or DC)	Temp. Effect ON Zero	±0.02%F.S/10°C
Zero Balance	±1%F.S	Construction	Stainless Steel
Insulation Impedance	≥5000MΩ	Protection Class	IP67&IP68
Safe Overload	150%F.S	Citation	GB/T7551-2008/OIML R60
Input Impedance	380±10Ω	Mode of Connection	Input+E:Red Input-E:Black Output+S:Green Output-S:White
Output Impedance	350±5Ω		

