


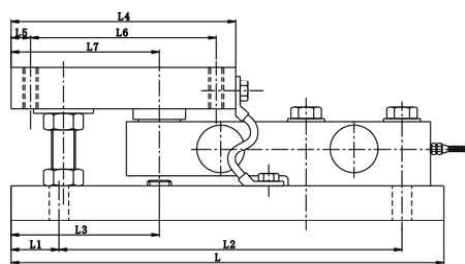



SSB-A/SS STATIC WEIGHING MODULE

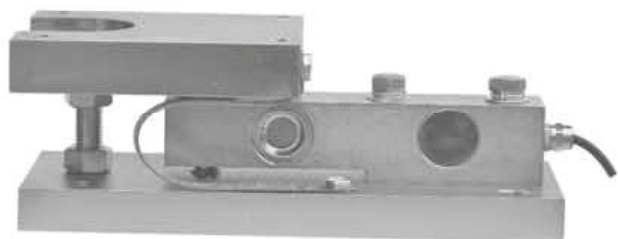


Install Methods



Radial installation




Tangential installation



Rectangle installation

Wiring Diagram



Applications

Applies to warehouse scale, hopper scale etc.

Features

1. Welded seal, high protection class, easy installation
2. High accuracy class and good stability

Description

Capacity	1,2,3,5,7.5,8,10,15,20,25t
Sensitivity	2.0±0.002 mV/V
Accuracy	C3
Construction	Alloy Steel/Stainless Steel
Protection Class	IP68

Capacity (t)	L	L1	L2	L3	L4	L5	L6	L7	W	W1	W2	W3	H	H1	H2	D	T
1~3	286	32	226	96	150	L5	124	99	112	80	128	102	102	19	24	Φ13	M10
5~8	318	32	257	99	178	16	146	102	152	102	152	120	129	29	38	Φ17	M16
10	360	32	295	105	184	16	152	108	154	106	154	122	166	44	44	Φ21	M20
15~25	400	25	350	115	220	25	170	115	220	170	220	170	211	54	54	Φ26	M24

TECHNICAL PARAMETER

Sensitivity	2.0±0.002mV/V	Output Impedance	352±3 Ω
Accuracy class	C3	Operating Temp. Range	-30 °C±70 °C
Repeatability	0.01%F.S	Maximum safe overload	120% F.S
Creep Error (30min)	0.02%F.S	Insulation Impedance	5000M Ω
TC0	0.015%F.S/10 °C	Excitation recommend	10V DC(15V Max.)
TC SPAN	0.015%F.S/10 °C	Construction	Alloy Steel/Stainless Steel
Input Impedance	400±20 Ω	Protection class	IP68

