

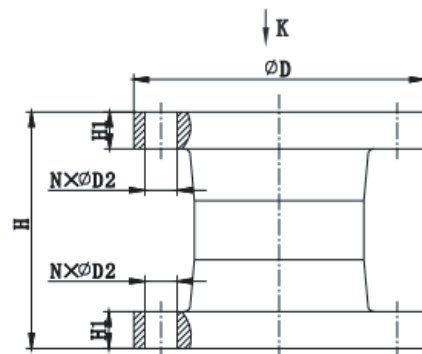


SZSP Series

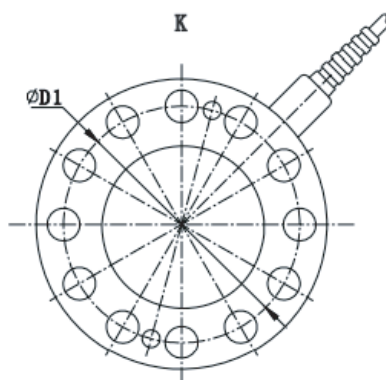

Compression testing situation, testing machine

Tons	H	H1	D	D1	NxØD2
40~60	160	25	197	160	12Ø22
100	230	40	240	200	12Ø26
150~200	326	57	305	250	12Ø32
300	358	69	415	360	18Ø33

TECHNICAL PARAMETER

6 Wires : Exc+(Red), Sig+(Green), Exc-(Black), Sig-(White), Sen+(Blue), Sen-(Yellow)

Rated Load	40, 60, 100, 150, 200, 300 Tons	Output resistance	702+5Ω
Sensitivity	2.0±0.01mV/V	Insulation resistance	≥5000MΩ
Accuracy Class	0.3	Nominal Temp Range	-10 +40 °c
Non-linearity	0.3%F.S	Service Temp Range	-30 +70 °c
Hysteresis error	0.3%F.S	Safe load limit	150%F.S
Creep (30min)	±0.05%F.S	Breaking load	200%F.S
TC ZERO	±0.03%F.S/10°C	Nominal of range excitation	10~12V DC
TC SPAN	+0.03%F.S/10°C	Protection Class	IP67
Input Resistance	750±10Ω	Cable Length	14m : 40t~100t 20m : 150t~300t

